


Chariot - REST API Documentation

To get there bearer token, which is required for all other requests, send a POST request to /login using basic auth. Here is an example using HTTPPie:

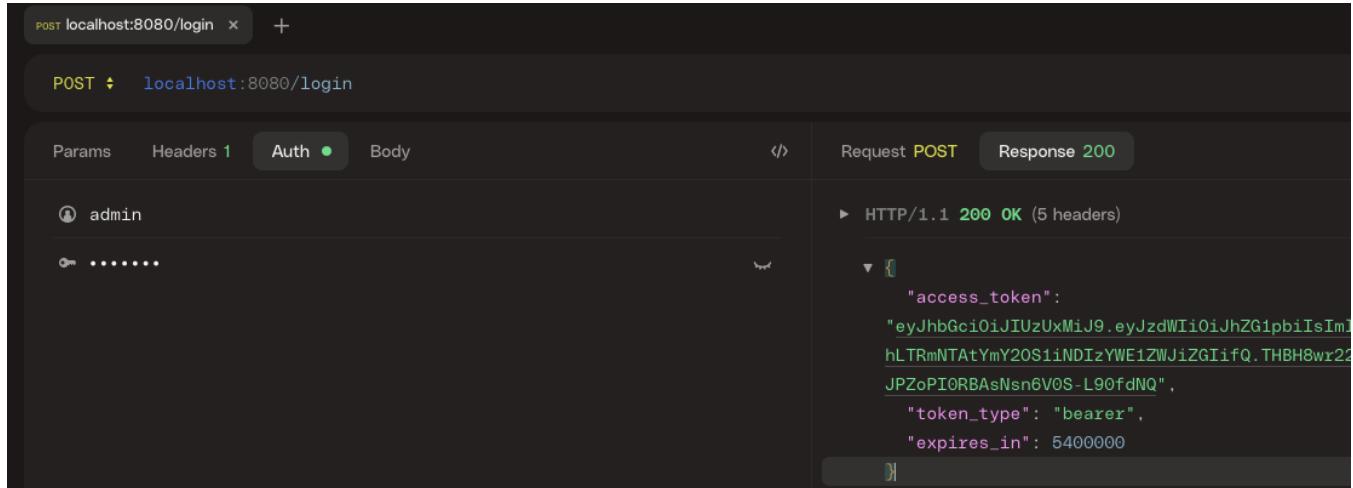

The screenshot shows the HTTPPie interface. A POST request is made to `localhost:8080/login`. The 'Auth' tab is selected, showing credentials: `admin` and `.....`. The response is a `HTTP/1.1 200 OK` with the following JSON content:

```
access_token":  
"eyJhbGciOiJIUzUxMiJ9.eyJzdWIiOiJhZG1pbisImI  
hLTrmNTAtYmY2OS1iNDIzYWE1ZWJiZGIifQ.THBH8wr22  
JPZoPIORBAAsNsn6V0S-L90fdNQ",  
"token_type": "bearer",  
"expires_in": 5400000
```

[openapi\(19\).yaml](#)